




THANK YOU



for purchasing a custom exhaust for your Honda Ruckus.

To install your exhaust please use these following steps.


- 1.** Use 2 two supplied M8x55 bolts.
Go through the hanger and supplied spacer
into the engine.

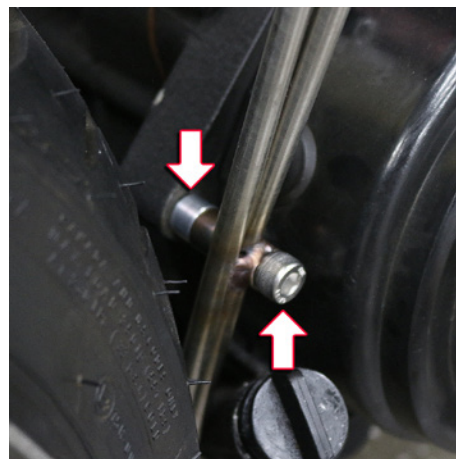

- 2.** It's easier to place the exhaust gasket on the studs first. It will align up with the header flange like so.

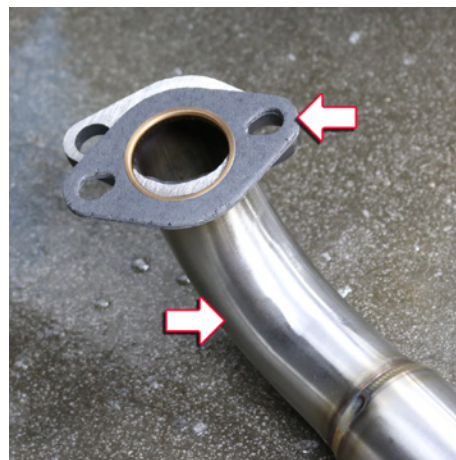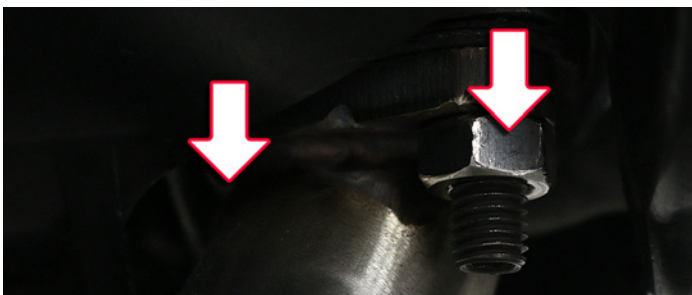

- 3.** Attach the spring to a muffler hook and the opposite side of the header hook. In the end, it should look like this.

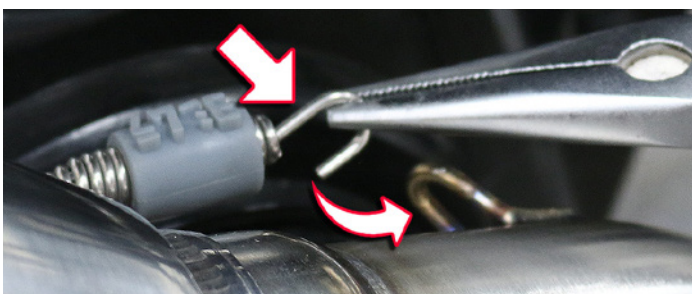



4. Use the longer M8 bolt. Go through the black dress-up washer through the muffler hanger, gold fitting, and right into the hanger. Use supplied nylock nut.



Make sure you go through everything and tighten all the bolts and nuts.



**ENJOY YOUR
NEW EXHAUST!**